



Donor 1991 S10 2.5L - Radiator Shroud Decal Data

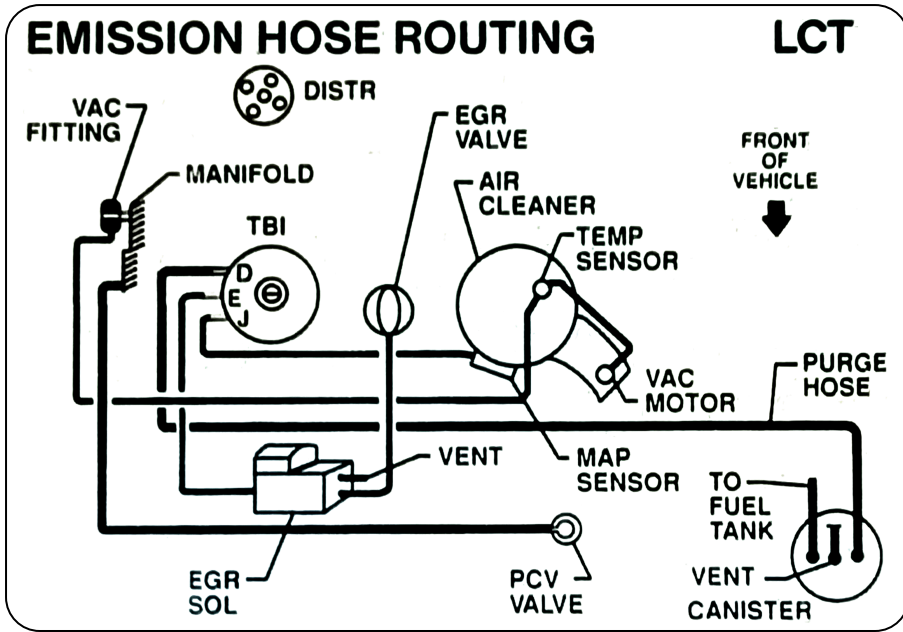

ACCESSORY DRIVE BELT ROUTING Donor 1991 S10 2.5L as used in RABUGGI

No AC, No PS:
Serpentine Belt, 6 rib
ACDelco 6K755
Eff. length 75.49", 1917mm
13/16" x 76.052" OC
20mm x 1932 mm OC
- NAPA 060755
- Advance 755K6
- Gates K060755
- Dayco 5060755

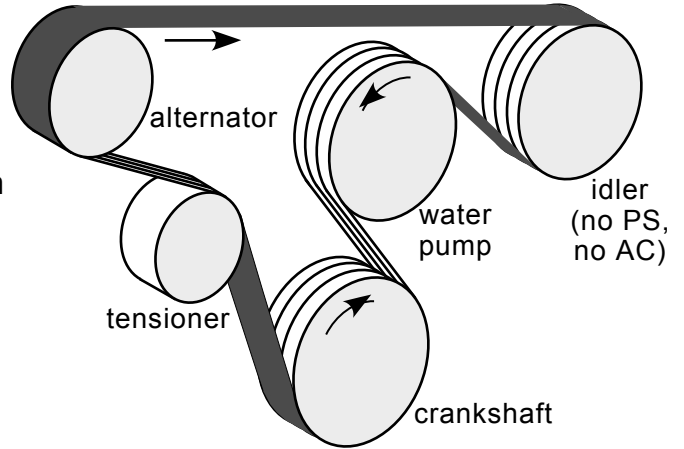

| | | | | | | |
|---|---|--|--|---------------------------------------|---------------------|--|
| LCT 2.5 LITER M3G2.5T5TEG2 MBO-3A | IMPORTANT VEHICLE INFORMATION ©1990 General Motors Corporation All Rights Reserved | | CATALYST EGR/TWC/02S | | TRANSMISSION | |
| | | | | AUTOMATIC | MANUAL | |
| | SET PARKING BRAKE AND BLOCK DRIVE WHEELS TIMING ADJUSTMENT: MAKE ADJUSTMENT WITH ENGINE AT NORMAL OPERATING TEMPERATURE AND AIR CONDITIONING OFF (IF EQUIPPED). | | TIMING (°BTC) | 8° (DR) | 8° (N) | |
| | <ol style="list-style-type: none"> VERIFY NO "SERVICE ENGINE SOON" LIGHT. GROUND DIAGNOSTIC CONNECTOR LOCATED UNDER DASH. [NOTE] "SERVICE ENGINE SOON" LIGHT WILL BEGIN FLASHING. WITH TIMING EQUIPMENT CONNECTED, SET THE AVERAGE TIMING OF CYLINDERS #1 AND #4 TO SPECIFICATION. REMOVE GROUND FROM DIAGNOSTIC CONNECTOR. VERIFY NO "SERVICE ENGINE SOON" LIGHT. | | SPARK PLUG GAP (IN.) | 0.060 | 0.060 | |
| | THIS VEHICLE CONFORMS TO U.S. EPA REGULATIONS APPLICABLE TO 1991 MODEL YEAR NEW LIGHT-DUTY TRUCKS. HOWEVER, IF THIS VEHICLE IS BUILT FOR USE IN CANADA, IT DOES NOT COMPLY WITH U.S. EPA FUEL LABELING REGULATIONS. | | [NOTE] IDLE AIR SPEED SCREW IS PRESET AND SEALED AT FACTORY. PROVISION FOR ADJUSTMENT DURING TUNE UP IS NOT PROVIDED. DO NOT ATTEMPT ADJUSTMENT. NO ADJUSTMENT PROVISIONS EXIST FOR IDLE SPEED OR IDLE FUEL MIXTURE. SEE SERVICE MANUAL, MAINTENANCE SCHEDULE AND EMISSION HOSE ROUTING DIAGRAM FOR ADDITIONAL INFORMATION. | | | |
| | | | | PT. NO. 10145499 PRINTED IN U.S.A. | | |